


# MB-U Series

5-Axis Machining Centers





Features Features

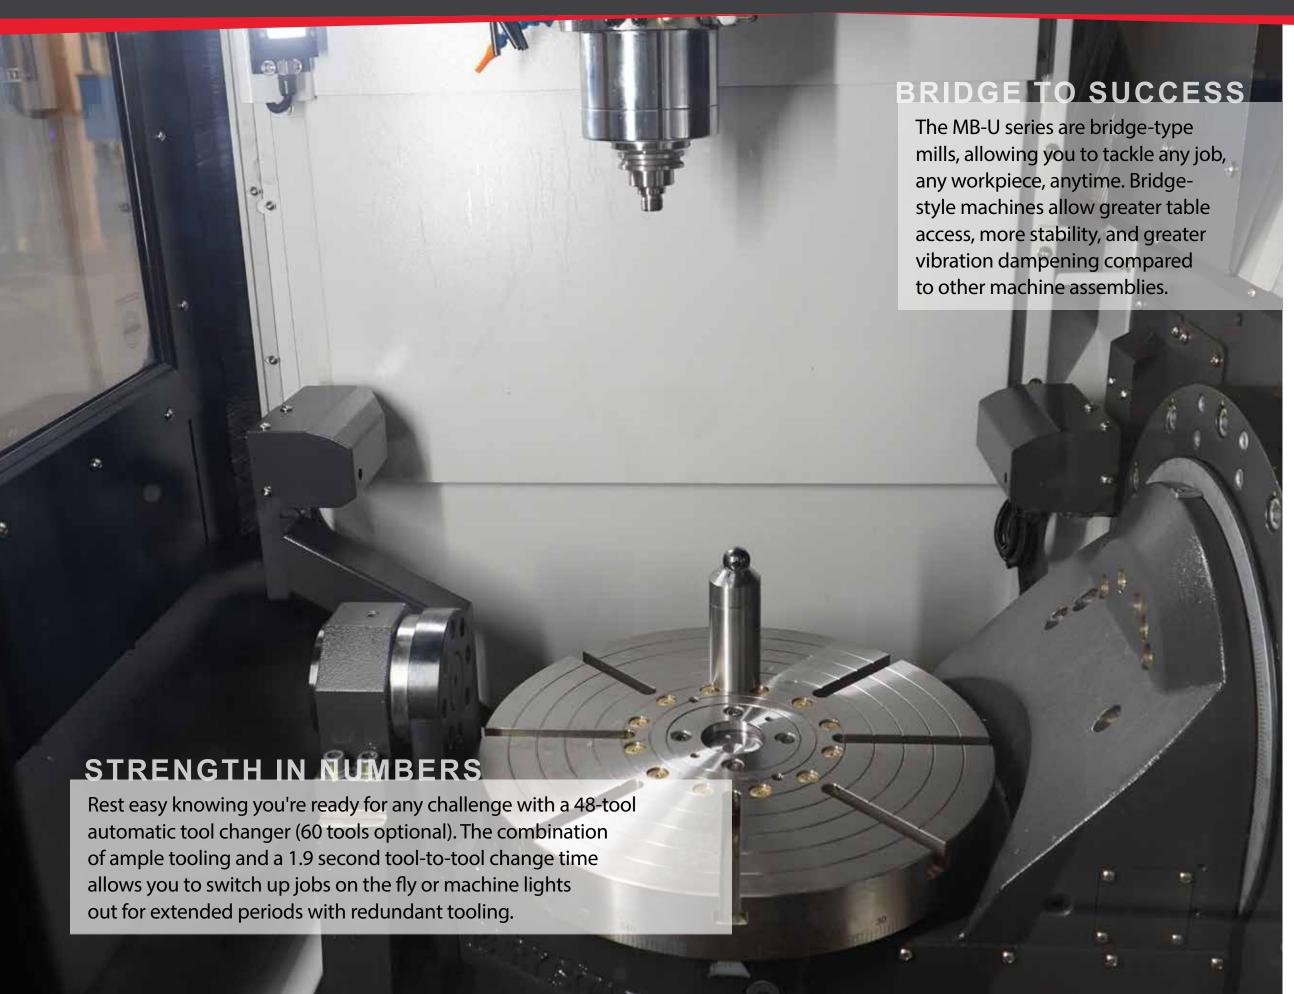

MEET THE PRODUCT MANAGER

### **DARREN WALL**



Realizing there was a gap in the marketplace for a well-rounded, high-quality, five-axis machine, we tapped into our CNC expertise and dedication to customer satisfaction to design the MB-U series.

Our unique vision was to create a versitle machine that could find a home in any shop. We wanted to create workhorse that could tackle any job, from high-speed roughing to precision finishing.

No matter what industry you're in or what job you throw at it — an MB-U will get it done.

#### Methods Machining Center Product Manager

303-885-6397

dwall@methodsmachine.com



Key Features

Simultaneous 5-axis FANUC 31iM-B5 control with 15" color display, 1-megabyte part program storage, 2-gigabyte data server, 100 megabits per second Ethernet, and 600 block look ahead

- ▶ BIG-PLUS 40-taper, 15,000 rotations per minute (rpm) spindle with oil-air lubrication, chiller, motor plate cooling, and thermal compensation
- ▶ FANUC Alpha Series direct-drive, hollow-shaft spindle motor with 25 horsepower (hp) on the MB 650U and 10 hp (20 hp optional) on the MB 450U
- ▶ Prepared for 1,000 psi/70 bar coolant through spindle (CTS) and coupling
- ▶ 48-tool (60 tools optional) arm-type ATC,
- ▶ Standard laser tool length measurement and part probe systems
- Automatic measurements, calculations, and corrections thanks to the Blum TC-60 spindle probe, equipped with table center point calibration
- Rapid travels of 36/36/36 meters/minute (MB 650U) and 48/48/48 meters/minute (MB 450U)
- Heidenhain scales on all five axes guarantee precise positional accuracy and compensate for thermal distortions
- Dust-tight electrical cabinet with heat exchanger

- ► Full circular hydraulic brake system for rigid B- and C-axis clamping
- ▶ Comprehensive chip management system comprising of four spindle coolant nozzles, four spindle coolant ring nozzles, a chip washdown system, and a coolant gun
- Chain/hinge-type chip conveyor with 1,050 millimeter drop off height for efficient, versatile chip removal
- Instantly clear chips with dual spindle air blast nozzles, air gun
- ▶ Full enclosure with bellows-type roof with a manual retractable top door maintains clean work environment
- Automatic grease lubrication system reduces downtime, maintenance and extends the life of the machine
- Independent manual pulse generator (MPG) handwheel gives you greater control and increases the ease of use
- Methods safety spec (CE mark modified)
- ▶ Machine operating manual & control manual (CD)

21 hand-scraped surfaces create the ideal machining environment. Hand-scraping is the foundation of precision, forming a perfectly flat surface within millionths of an inch and up to 10 contact points per square inch. Hand-scraping limits chatter, prolongs machine life, and facilitates oil pockets that reduce wear and tear.

Prevent the collision course and protect your investment with FANUC's 3D interference check function. The advanced anti-collision system detects potential crashes in real time, safeguarding your tool, workpiece, and table. There's minimal setup time, and the system is easily adaptable.

Maintain high speeds without breaking

Always have the right tool for the right job with the 48-tool\* ATC. The large-capacity ATC ensures you're equipped for anything, from a demanding job requiring dozens of tools to time-consuming jobs requiring redundant tooling. The auto door provides a debris-free machining environment.

\*60-tool ATC optional

**Building a better machine** starts with the design. MB-U machines are bridge mills, giving you better table access, the ability to machine a diverse range of parts and achieve higher tolerances through vibration dampening. All axis have linear guideways, providing better rigidity and durability compared to other constructions.




# MB-U Tech Specs

Technical specifications and features are more than numbers on a page; they tell you what a machine tool can accomplish and how it will perform in your shop. We designed MB 450U and 650U to withstand the most demanding machining conditions and adapt to any manufacturing environment. The MB-U series is constructed to perform at the highest levels without fail, these machines will stand the test of time.



- ▶ 5-Axis Opportunities: Machine intricate parts faster, reduce load/unload times, and eliminate opportunities for error with 5-axis machining. The MB 450U and 650U have the high-quality components and design attributes to give you a flawless 5-axis experience.
- PClean Machine, Clear Results: Our comprehensive chip management system, comprising of a coolant gun, coolant nozzles, and a chip conveyor, makes keeping your machining environment chip-free an effortless endeavor.

			• /
Feature	Unit	MB 450U	MB 650U
TRAVEL			
X/Y-Axis	in (mm)	X: 15.7 (400) Y: 13.8 (350)	X: 24.4 (620) Y20.47 (520)
Z-Axis	in (mm)	13.8 (350)	18.1 (460)
B-Axis Tilting	٥	-5 ~ +110	
C-Axis Rotation	0	360	
TABLE			
Table Size (Diameter)	in (mm)	17.72 (450)	25.59 (650)
Max. Table Load	lbs (kg)	441 (200)	661 (300)
Number of T-Slots	qty	8	5
T-Slot Width	in (mm)	.55 (14)	.71 (18)
SPINDLE			
Spindle Speed	rpm	15,000	
Spindle Type	Dual Contact	BIG-PLUS 40-Taper	
Spindle Power	hp (kW) 30 min	10 (7.5)	25 (18.5)
Spindle Torque	ft-lb (nm) 30 min	35 (47.7)	93 (126)
Spindle Cooling	-	Chiller	
AUTOMATIC TOOL CHA	ANGER		
Maximum Number of Tools	-	48 (60 optional)	
Maximum Tool Weight	lbs (kg)	15.4 (7)	
Maximum Tool Length	in (mm)	9.84 (250)	
GENERAL			
Floor Space	in (mm)	139 x 122.5 (3,538 x 3,112)	146.8 x 119.4 (3,729 x 3,032)
Weight	lbs (kg)	13,230 (6,000)	19,400 (8,800)
Height	in (mm)	1198(2,997)	130.3 (3,310)

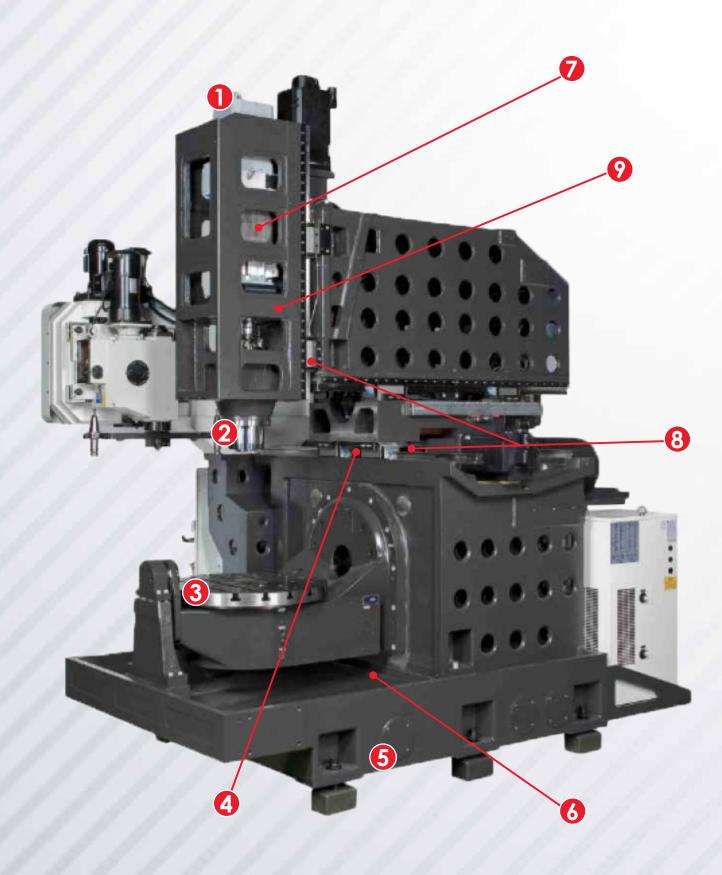

# A Solid Foundation 60+ Years in the Making

- Power through the hardest materials with the direct-drive, hollow-shaft spindle motor prepared for 1,000 psi CTS.
- **Powerful spindle, protective lubrication:** Handle roughing, precision cutting, surface finishing, and everything in between with the versatile BIG-PLUS, dual-contact 15,000 rpm spindle. The oil and air lubrication system helps prevent runout and keeps the spindle accurate and precise.
- Increase efficiency and machine complex parts with the B/C-type tilt rotary table. The 450U and 650U tables can handle loads up to 441 lbs and 661 lbs, respectively. B-axis tilting ranges from approximately -5° to +110°, and the C-axis can rotate 360°.
- More uptime and productivity thanks to the automatic grease lubrication system on all axes. Lubricating all axes inherently reduces downtime and maintenance.
- Simulated conditions for natural machining. Methods designed the MB-U series using finite element analysis (FEA) techniques complex mathematical simulations creating a natural machining experience. Castings meet Meehanite engineering standards, giving the machine uniform, dependable mechanical properties.
- Maintain pristine part quality and preserve tool life with the MB-U's comprehensive chip management system, comprised of a hinge-style conveyor, coolant wash down, and coolant flush gun.
- **Keep cool under pressure** even under the most extreme conditions, thanks to the spindle chiller and motor plate cooler. The spindle/head cooling system **keeps thermal growth in check**.
- Robust roller guideways give you more rigidity and better vibration dampening. Roller balls provide more rigidity compared to other guideways, and can handle varied loads without distorting the workpiece.
- Adapt and adjust with the thermal compensation system, utilizing five thermo-couples for real-time temperature feedback.

# Equipped with FANUC Fast Package III

FANUC's Most Advanced 5-Axis Software Package



#### Rest Assured with Time-Tested, Industry-Trusted Quality Control

- Methods Machine Tools sets rigid quality requirements that ensure our machines and inspection equipment are calibrated, monitored, and controlled using industry-standard systems and methods.
- Our team of seasoned machining experts, programmers, electrical engineers, and application specialists pour over every schematic and check every detail. We conduct rigorous tests and comb through every specification so you don't have to.

#### Raising the Bar for Excellence

- All MB-U machines are laser-interferometer and ballbar-tested to certify perfect positioning while delivering practical data and benchmarks. These systems assess and confirm the static and dynamic accuracy of the machine.
- Ballbar testing monitors spindle movement across a programmed path and compares the results
  to a perfect circle. The test considers all the variables in machining, such as machine geometry,
  temperature fluctuations, and tool wear, to produce accurate parts and give you actionable
  data
- Ballbar tests are recognized by international standards such as ISO 230-4 and ANSI/ASME B5.54.

A Dynamic High-Accuracy, High-Performance 5-Axis Simultaneous Cutting Test is performed on each MB-U machine according to the NAS979 standard, ensuring that every machine meets and/or exceeds strict performance and quality specifications. Roundness Value Tested .0003" (8µ).




# **MB 650U AMP**

#### **Automatic Manufacturing Package (AMP)**

Bring instant precision and automation into your shop, reduce manual intervention and improve throughput and uptime with the MB 650U AMP. The system combines the accuracy and speed of Methods' 5-axis MB 650U machining center and the convenience of the Indumatik UL300 automatic pallet changer (APC).



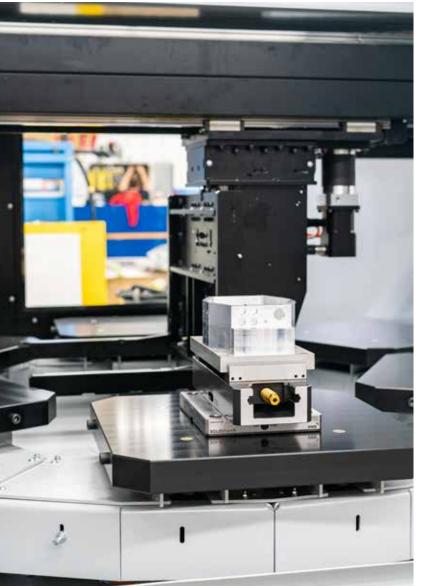

#### **APC POWER**

The compact APC measures just 82.68" x 82.68" (2,100 mm x 2,100 mm). Combined with an expansive work envelope, the MB 650U AMP is a comprehensive, versatile manufacturing workhorse that can machine a variety of workpieces. **With six or eight pallet arrangments**, the MB 650U AMP can be configured to your specific needs.

#### PRISTINE, PRECISE MACHINING

Features include meticulously crafted 21 hand-scraped surfaces, a dual-contact spindle, and tool probes, enabling precise, quick workpiece analysis. All five axes have Heidenhain scales, giving you the ability to obtain higher dimensional tolerances.



#### MB 650U AMP FEATURES

- Six or eight pallet configurations
- Simple, dedicated cell control

- Ergonomic load/unload station
- Compact footprint

#### MB 650U AMP SPECIFICATIONS

Spindle	25 hp, 106 ft-lbs of torque, 15,000 rpm	
ATC Capacity	48 (60 optional)	
Max Pallet	6 pallets: 19.7" x 19.7" (500.38 mm x 500.38 mm)	
Workpiece Size	8 pallets: 14.7" x 14.7" (400 mm x 400 mm)	
Max Workpiece	6 pallets: 425 lbs (193 kg)	
Weight	8 pallets: 500 lbs (226.79 kg)	

## **SERVICE**

Methods' earned its unique reputation by developing a comprehensive umbrella of support and sales services utilizing decades of hands-on experience and expertise. Our sales and support staff work with an extensive national network of distributors and dealers to offer specific solutions for machine shop owners.

The unique blend of seasoned engineers, young talent, and an average level of experience of 15 years guarantees customer satisfaction.



# **APPLICATIONS** ·


Methods applications engineering team is dedicated to solving challenges by integrating modifications and developing machining configurations. Our engineers analyze your needs and develop the best solution to elevate your business and help you reach your goals.


Methods has taken application engineering and technology to the next level, offering precise machine selection, programming, and automation. We stay ahead of the curve to keep you ahead of the competition.



## **AUTOMATION**

Automation offers the greatest potential for increased productivity. Methods has more than 30 automation specialists nationwide and includes design, control, integration/assembly, and field service/installation engineers. We recognize there is no one-size-fits-all solution. That's why all of our automation and integration specialists develop customer-specific solutions that reduce costs and increase throughput.

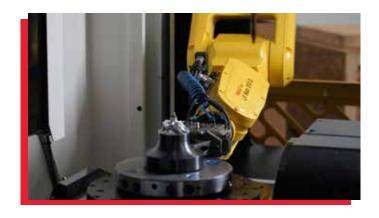

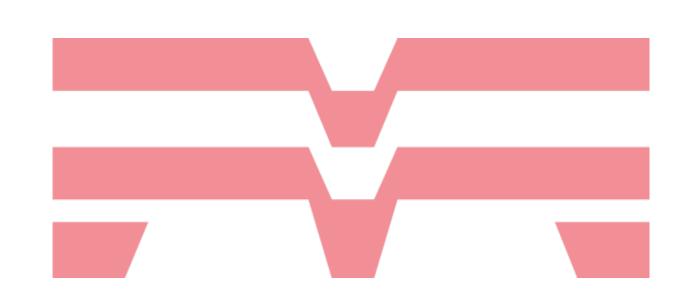

\*Specifications are subject to change without notice

